

Retail Store Display

- > The **PRO-Link**® Display improves product visibility and sales.
- Dealers easily offer an assortment of product in a neat, compact and safe way.
- > Retail dealers typically realize attractive, profitable margins.
- Display unit promotes a premier product well known for reliable performance.






P.O. Box 548 Tontitown, AR 72770-1090


Phone (855) 361-5987 Fax (855) 818-8865 prolinkhayspears.com sales@hayspears.com



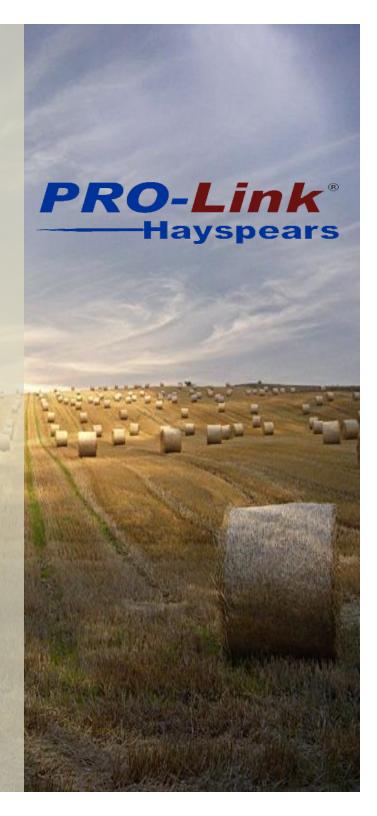





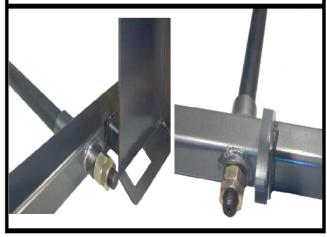

Recommended Product Mix

PRO-Link® suggests the following product selections, your product needs may vary and can be changed to suit your customer's demands.

- 2 of a 48SB bracket spear
- > 4 of a 48SS straight spear
- > 4 of a 48TS tapered spear
- > 4 of a 48TS tapered spear
- 4 of a 39TS straight spear

Additional Stock Options

- > 39SB bracketed spear
- > 49TXJ heavy duty tapered spear
- 336TXJ/396TXJ/436TXJ multipurpose tapered spears

Hardware Package

- 2 155 cross bolt sleeves
- 2 114T tapered sleeves
- 2 165BU bracket with U-bolts
- > 4 58X3U U-bolt assemblies
- > 2 112 cross bolt sleeve (2" O.D.)
- 2 stabilizer bars



PRO-Link® offer maximum performance when properly installed and used to move hay.

<u>Sleeve installation</u>: weld *PRO-Link* sleeve into square tubing. Do not weld the sleeve into your implement with the spear in the sleeve. <u>Never</u> weld on the spear or attempt to repair a broken spear.

Conical nut on tapered Hayspears® should be tightened to 200 – 300 foot lbs. Routinely check the nut to make sure it remains tight. Applying Loctite® or some similar product to the threads maintains nut tension.

Rating: 15%" diameter Hayspears® are rated for 3,000 lbs @ 30" load center and, 134" diameter spears are rated for 3,700 lbs @ 30" load center. When handling hay that exceeds these capacities, a multiple spear implement should be used.

Recommendations: PRO-Link
Hayspears® should not be used for a
purpose other than moving hay. Any
other application is considered to be
product misuse.

